

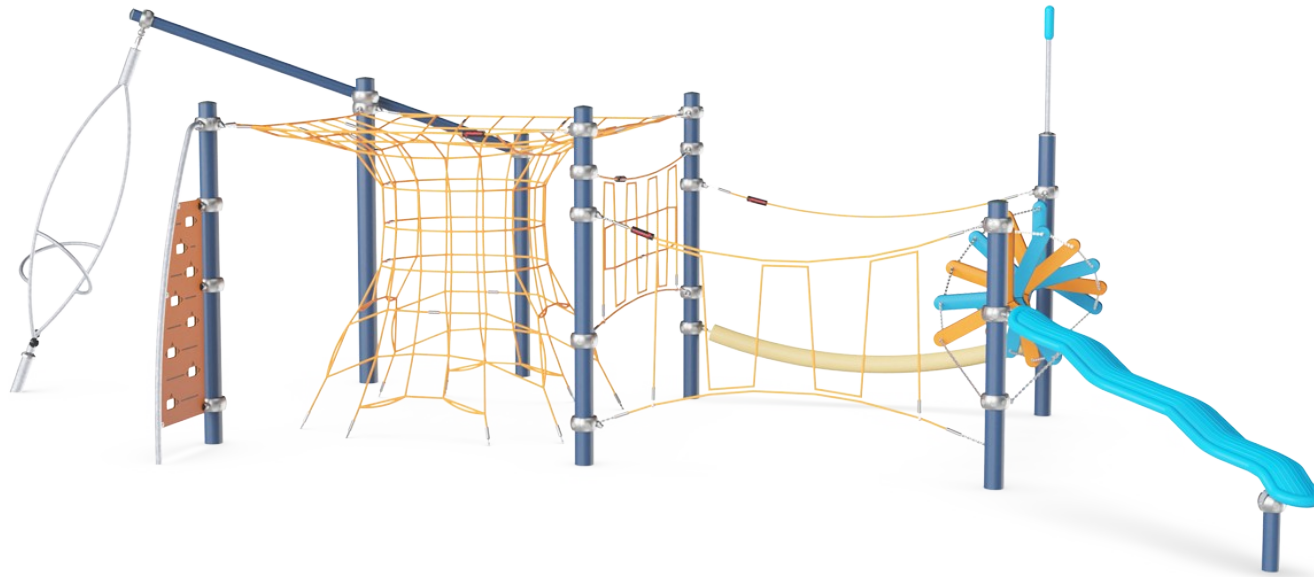


Javan Trail

CRP251201

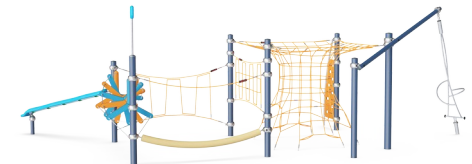

| Item no. CRP251201-0903 | |
|-----------------------------|---|
| General Product Information | |
| Dimensions LxWxH | 1074x604x328 cm |
| Age group | 6+ |
| Play capacity (users) | 30 |
| Colour options | ● ● ● |

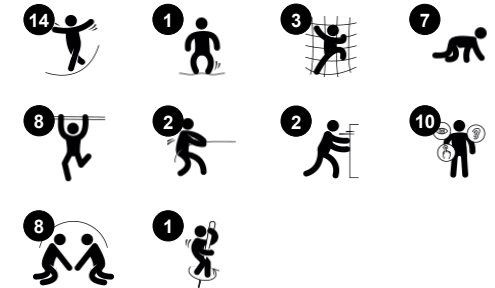

The Javan Trail invites thrilling, responsive challenges for children. The variety of play activities makes children come back again and again for more fun. The responsive, swaying ropes call for concentrated movement, adjusting grips and rhythms of climbing. This trains the child's agility, balance and coordination. These motor skills are

fundamental for moving confidently in the world. They build the basis for e.g. concentrating on tasks and sitting still for longer periods. Apart from being great fun, the varied climbing, crawling, tight-rope walking and spinning activities train arm, leg and core muscles. The Propeller Climber provides a fun crawl-and-meet place. The Musca Spinner

exhilarates groups of children when pushed into motion. This incorporates an understanding of gravity principles. The cooperative effort supports empathy, turn-taking and self-regulation; skills that help children make friends for life.

Javan Trail


CRP251201



Ropes are made of UV-stabilized PES rope strands with inner steel cable reinforcement. The polyester wrapping is inductively melted onto each strand to obtain excellent wear and tear resistance.



Corocord 'S' clamps are used as universal connections in Corocord products. 8mm stainless steel rods with rounded edges are pressed around the ropes with a special hydraulic press, making them the ideal connector: safe, durable and vandalism-proof, all while allowing the typical movement of rope play structures.

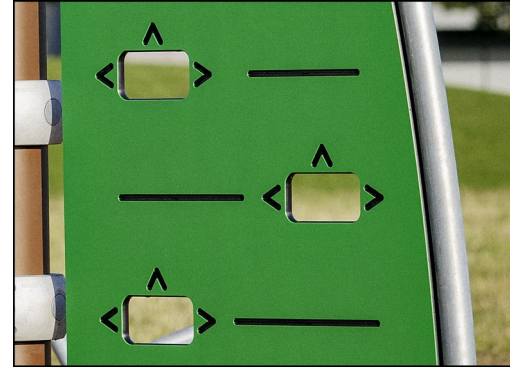

Panels of 19mm EcoCore™. EcoCore™ is a highly durable, eco friendly material, which is not only recyclable after use, but also consists of a core produced from 100% recycled post consumer material from food packing waste.

Item no. CRP251201-0903

Installation Information

| | |
|--------------------------|--------------------------|
| Max. fall height | 240 cm |
| Safety surfacing area | 86.5 m ² |
| Total installation time | 27.2 |
| Excavation volume | 15.53 m ³ |
| Concrete volume | 8.93 m ³ |
| Footing depth (standard) | 90 cm |
| Shipment weight | 1,107 kg |
| Anchoring options | Surface ✓ In-ground ✓ |

Warranty Information

| | |
|--------------------------|----------|
| Hot dip galvanised steel | Lifetime |
| Painted toplayer | 10 years |
| Ropes & nets | 10 years |
| Aluminium clamps | 10 years |
| Spare parts guaranteed | 10 years |



Colored steel components have a base of hot dip galvanization and a powder coated top finish. This provides an ultimate corrosion resistance in all climates around the world. Other steel surfaces are hot dip galvanized inside and outside with lead free zinc.




Corocord smart clamps are carefully designed in every detail to ensure superior flexibility in high quality aluminum material. The smart clamps are attached around the posts with four steel bolts. Not used attachment points are closed with PA caps.



The PP rope in coconut style has a diameter of 150 mm. The internal steel wire core has thimbles at both ends, which serve as attachments for the rope to existing connecting elements.



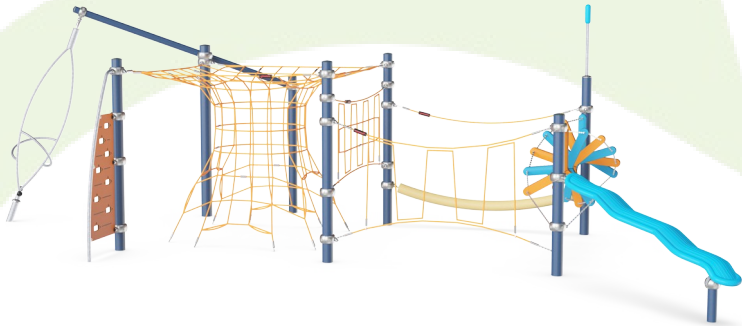

| Cradle to Gate A1-A3 | Total CO ₂ emission | CO ₂ e/kg | Recycled materials |
|----------------------|--------------------------------|-------------------------|--------------------|
| | kg CO ₂ e | kg CO ₂ e/kg | % |
| CRP251201-0903 | 2,853.00 | 3.44 | 43.60 |

The overall framework applied for these factors is the Environmental Product Declaration (EPD), which quantifies "environmental information on the life cycle of a product and enable comparisons between products fulfilling the same function" (ISO, 2006). This follows the structure and applies a Life-Cycle Assessment approach to the entire Product stage from raw material through manufacturing (A1-A3))

Kompan A/S
 C.F. Tietgens Boulevard 32C
 DK-5220 Odense SØ
 Denmark



Validation of CO₂ calculation of: Corocord



Data version no. 2021-09-27

The CO₂ calculation and data are in compliance with the principles of a carbon footprint impact according to the GHG protocol (Greenhouse Gas Protocol), Scope 3, cradle to gate related to all individual components in the product category: "Corocord" represented by item no.: COR314011-1101.

(Scope 3 emissions include emission sources in the upstream and downstream value chain).

Date: 15. October 2021 | Valid until: 15. October 2023

Validated by:

Bente Hviid, Senior Consultant

Peter Bendtsen, Senior Consultant

Validation based on report: Validation of CO₂ calculation of 8 categories of Kompan product line, version 1.0, prepared by: Bureau Veritas HSE, Denmark: Bente Hviid and Peter Bendtsen.

Publication date: 15. October 2021

By Bureau Veritas HSE
 www.bureauveritas.dk
 +45 7731 1000





Javan Trail

CRP251201

* Max fall height | ** Total height | *** Safety surfacing area

* Max fall height | ** Total height

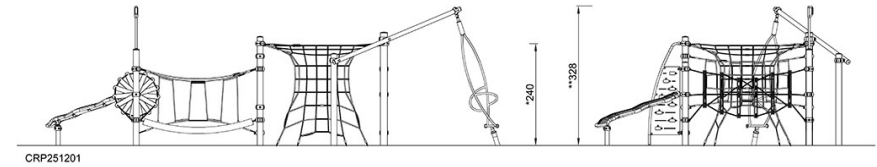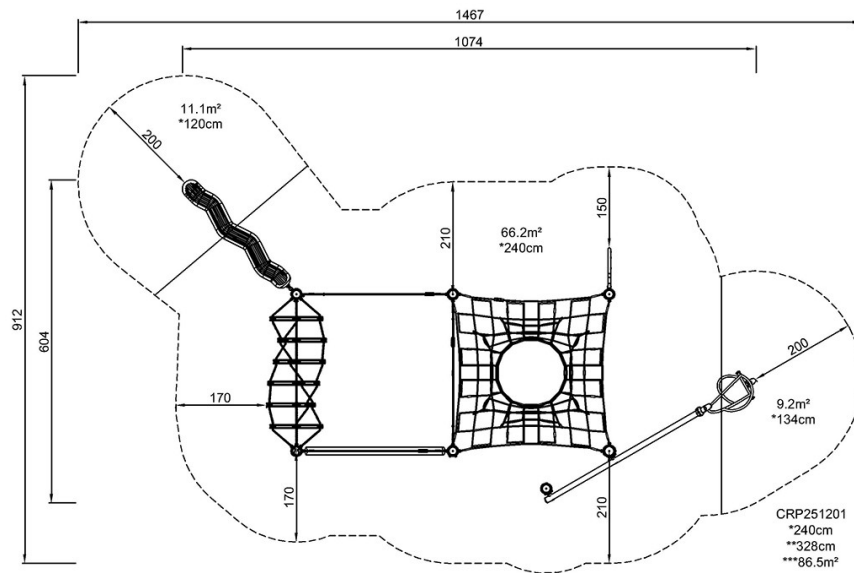

[Click to see TOP VIEW](#)

[Click to see SIDE VIEW](#)