



Product technical sheet

ROBINIA RB1902



6+



24 kids



54,1 m²



Material specification

- Construction made of Robinia - very durable acacia wood with a diameter of ~ 12 - 18 cm without sharp edges, resistant to weather conditions,
- Platforms, gangways, side panels and seats made of Robinia - very durable acacia wood, resistant to weather conditions,
- Roofs made of strong Robinia acacia wood with colorful elements made of HPL plate, resistant to weather conditions,
- Side panels made of durable HPL plate, resistant to weather conditions,
- Slides made of stainless steel,
- Colorful elements made of durable HPL plate, resistant to weather conditions,
- Moving elements made of durable HPL plate, resistant to weather conditions,
- Telescope made of stainless steel and durable HDPE plate, resistant to weather conditions,
- Flags made of HPL plate, resistant to weather conditions, mounted on a stainless steel structure,
- Windows made of Plexiglas mirrors in a safe cover made of HPL plate, resistant to weather conditions,
- Grates made of safe, certified rubber with textile reinforcement,
- Climbing stones made of durable HPL plate, resistant to weather conditions, and stainless steel,
- Steel ropes in polypropylene braid, connected with durable plastic elements, stainless steel or aluminum,
- Calibrated stainless steel chains, preventing fingers entrapment,
- Handles made of steel rope in polypropylene braid,
- Screws covered with plastic caps and/or stainless steel screws,



Facilitating disability



shelters



Intellectual development



thinking



Physical development



balance



hiding



sliding



observation



community



rest



passage



climbing





1
number of towers



1
number of slides



1
number of roofs



3
number of interactive elements



8
number of activity elements

Product technical sheet

ROBINIA RB1902


Product data

Length	770 cm
Width	490 cm
Total height	505 cm
Age group	6+ years
Number of users	24 kids
Safety zone	54,1 m2
Free fall height	210 cm
The height of the platforms	120, 180, 210,240 cm
slide platform height	180 cm
In accordance with norm EN	1176-1:2017+A1:2023
Availability of spare parts	YES



Data is subject to change without prior notice.

Additional information

- equipment adapted for the disabled; intended for public playgrounds;
- equipment has a certificate issued by an accredited entity or a declaration of conformity;
- no sharp edges or chinks that would pose a danger of jamming the head, fingers or any other body parts;
- anchoring on flat surface, 80/70/60 cm deep;
- slide should not be installed southwards;
- render is for reference only, the actual appearance of the equipment and its color may vary;

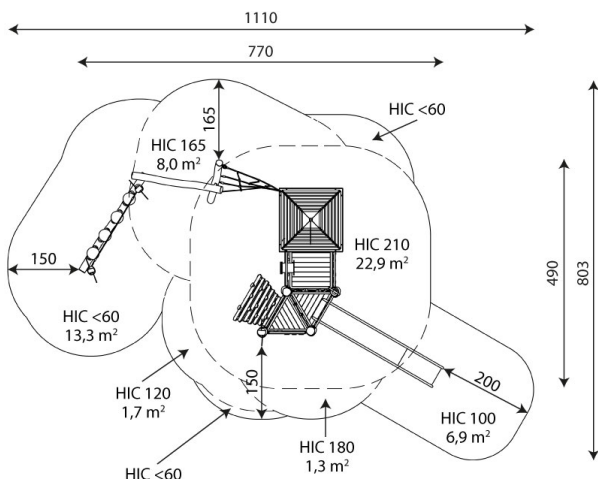

54,1 m²

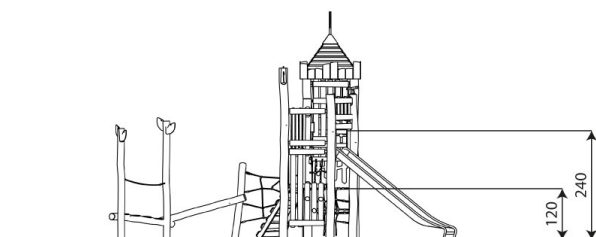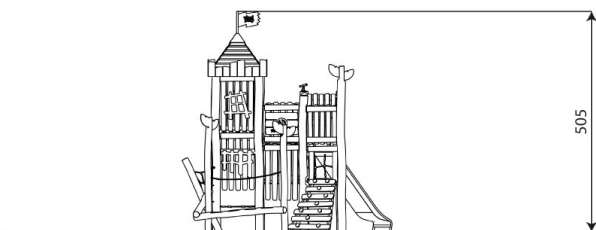

Guarantee

30 30 year guarantee - Durability of steel and stainless steel structural elements

15 15 year guarantee - Durability of steel and stainless steel structures of mobile devices; durability of Robinia wood structural elements

10 10 year guarantee - Structural strength of HDPE, 100% recycled HDPE and HPL elements; structural elements made of 100% recycled material (composite)

5 5 year guarantee - Corrosion resistance of stainless steel and hot-dip galvanized and powder-coated steel elements, resistance to bark beetles and rotting of wooden structural elements

Detailed information in the guarantee card

Vinci Group Sp. z o.o.
Seminaryjna 9 Street
99-400 Łowicz

VAT: 534-250-14-46
PHONE: +48 42 203 24 99 ext. 26
M: +48 793 404 991



biuro@vinci-play.com
info@vinci-play.com
www.vinci-play.com

Surfaces according to EN 1176-1:2017+A1:2023

	Description (mm)	Layer thickness (cm)	Maximum fall heights (cm)
Turf/ top layer of soil (A,B,C)	-	-	≤100
bark (A,C)	Particle size from 20 to 80	30	≤200
		40	≤300
woodchips (A,C)	Particle size from 5 to 30	30	≤200
		40	≤300
sand or gravel (A,C)	Particle size from 0,25 to 8	30	≤200
		40	≤300
synthetic attested (A,B,C)	Tested according to EN 1177		210

Product technical sheet

ROBINIA RB1902

Amount of safe surface corresponding with free fall height:

HIC <60	13,3 m ²
HIC 100	6,9 m ²
HIC 120	1,7 m ²
HIC 165	8,0 m ²
HIC 180	1,3 m ²
HIC 210	22,9 m ²

Data is subject to change without prior notice.

