

# Saimiri Trail

CRP251401



Item no. CRP251401-0903	
General Product Information	
Dimensions LxWxH	647x1023x348 cm
Age group	6+
Play capacity (users)	24
Colour options	



The Saimiri Trail's WOW factor is its transparent, hugely varied range of difficulty levels in climb, crawl, spin, rotate, sway and balance activities. These activities help develop children's agility, balance and coordination, motor skills that are fundamental for a range of important life skills. Eventually, this supports a secure and confident navigation of the body.

The fun loop of varied activities supports classic games, e.g. "the ground is made of lava", which pump up the heartrate and encourage cooperation. The possibility to communicate across the play unit and take breaks at several destinations supports turn-taking and communication, important social-emotional skills that are supported in play. The

Musca Spinner offers a solitary spinning point at hilarious speed, where children use all body muscles to push and pull themselves into fast rotation. This supports empathy and cooperation, and not least an incorporated understanding of gravity.



# Saimiri Trail


CRP251401



Ropes are made of UV-stabilized PES rope strands with inner steel cable reinforcement. The polyester wrapping is inductively melted onto each strand to obtain excellent wear and tear resistance.



Corocord 'S' clamps are used as universal connections in Corocord products. 8mm stainless steel rods with rounded edges are pressed around the ropes with a special hydraulic press, making them the ideal connector: safe, durable and vandalism-proof, all while allowing the typical movement of rope play structures.

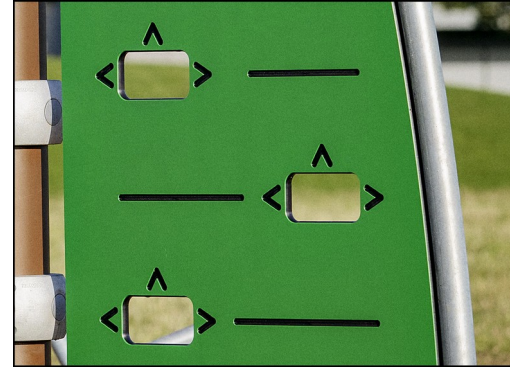

Panels of 19mm EcoCore™. EcoCore™ is a highly durable, eco friendly material, which is not only recyclable after use, but also consists of a core produced from 100% recycled post consumer material from food packing waste.


Item no. CRP251401-0903

### Installation Information

Max. fall height	240 cm
Safety surfacing area	92.7 m <sup>2</sup>
Total installation time	29.6
Excavation volume	14.66 m <sup>3</sup>
Concrete volume	8.55 m <sup>3</sup>
Footing depth (standard)	90 cm
Shipment weight	1,169 kg
Anchoring options	Surface ✓ In-ground ✓

### Warranty Information

Hot dip galvanised steel	Lifetime
Painted toplayer	10 years
Ropes & nets	10 years
Aluminium clamps	10 years
Spare parts guaranteed	10 years

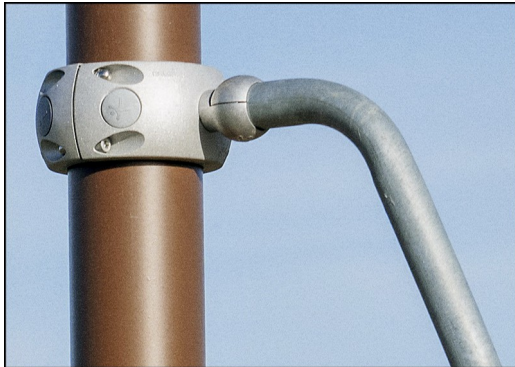

Colored steel components have a base of hot dip galvanization and a powder coated top finish. This provides an ultimate corrosion resistance in all climates around the world. Other steel surfaces are hot dip galvanized inside and outside with lead free zinc.



Corocord smart clamps are carefully designed in every detail to ensure superior flexibility in high quality aluminum material. The smart clamps are attached around the posts with four steel bolts. Not used attachment points are closed with PA caps.



Rocking tube is made of medium density PE with excellent impact strength and usable within a large temperature span. The longitudinal grooves provides a slip resistant surface for safe play.





Cradle to Gate A1-A3	Total CO <sub>2</sub> emission	CO <sub>2</sub> e/kg	Recycled materials
	kg CO <sub>2</sub> e	kg CO <sub>2</sub> e/kg	%
CRP251401-0903	2,902.70	3.34	44.30

The overall framework applied for these factors is the Environmental Product Declaration (EPD), which quantifies "environmental information on the life cycle of a product and enable comparisons between products fulfilling the same function" (ISO, 2006). This follows the structure and applies a Life-Cycle Assessment approach to the entire Product stage from raw material through manufacturing (A1-A3))

**Kompan A/S**  
 C.F. Tietgens Boulevard 32C  
 DK-5220 Odense SØ  
 Denmark



### Validation of CO<sub>2</sub> calculation of: Corocord



Data version no. 2021-09-27

The CO<sub>2</sub> calculation and data are in compliance with the principles of a carbon footprint impact according to the GHG protocol (Greenhouse Gas Protocol), Scope 3, cradle to gate related to all individual components in the product category: "Corocord" represented by item no.: COR314011-1101.

(Scope 3 emissions include emission sources in the upstream and downstream value chain).

**Date: 15. October 2021 | Valid until: 15. October 2023**

**Validated by:**

Bente Hviid, Senior Consultant

Peter Bendtsen, Senior Consultant

Validation based on report: Validation of CO<sub>2</sub> calculation of 8 categories of Kompan product line, version 1.0, prepared by: Bureau Veritas HSE, Denmark: Bente Hviid and Peter Bendtsen.

**Publication date: 15. October 2021**

**By Bureau Veritas HSE**  
 www.bureauveritas.dk  
 +45 7731 1000





# Saimiri Trail

CRP251401

\* Max fall height | \*\* Total height | \*\*\* Safety surfacing area

\* Max fall height | \*\* Total height

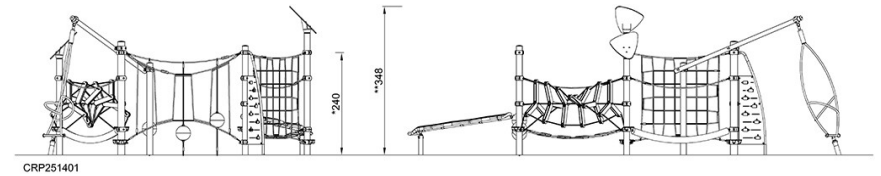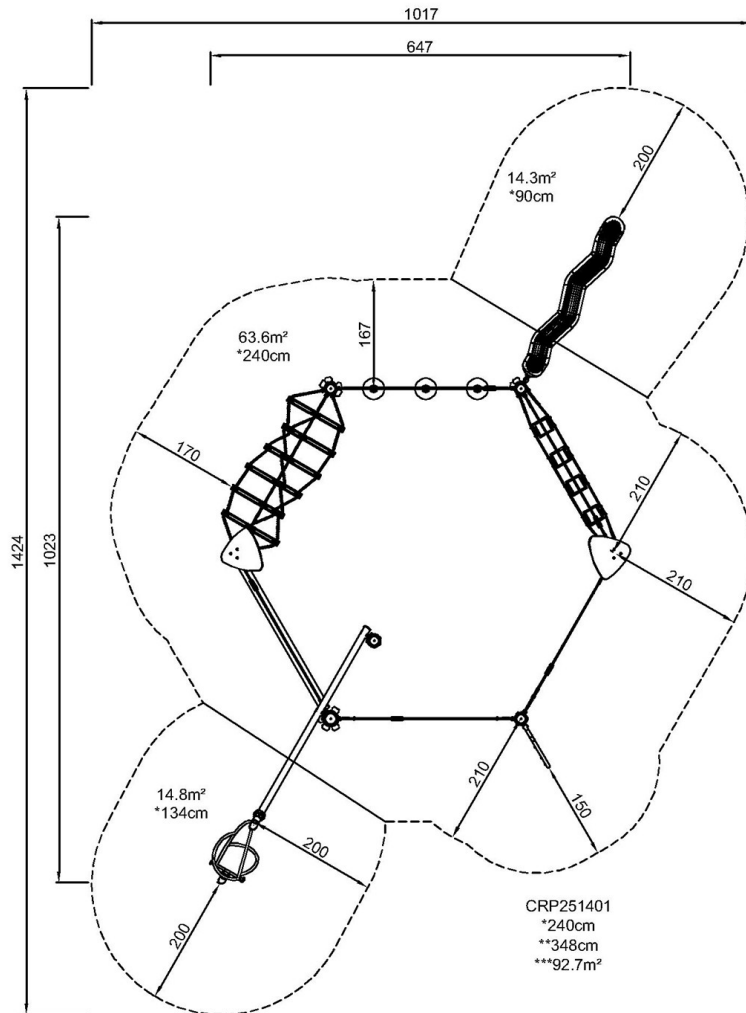

[Click to see TOP VIEW](#)

[Click to see SIDE VIEW](#)